

www.airpipeusa.com 602-362-PIPE (7473)

Rigid Aluminum Pipe



- Up to max. 8" (200mm) diameter.
- High-quality powder coating available in blue, green
- and gray. Additional colors can also be supplied. • Designed for compressed air, vacuum, and inert gases.
- Light-weight & corrosion-free.

Aluminum Pipe Connectors



- Quick-connect design. Superior reliability & longevity. Largest selection of fitting configurations.
- Modular & reusable. • 100% recyclable & non-flammable materials.

Aluminum Quick Drop Fittings



- Quick installation to main ring.
- Can be used vertically or horizontally. Design does not allow water to enter downstream
- Configurations allow for multiple drop connection
- types. e.g., hose reels.

Ball & Butterfly Valves



 Quick connection. Available for NPT thread, flange, and quick connection types. High-flow design ensures optimal performance.


Flexible Hoses



- Suitable for compressor & equipment outlets
- to absorb vibration. Allows for expansion and contraction of the
- pipe system.
- Bypass obstacles. Resistant to mineral or synthetic lubricated oils.

Tools & Accessories





ALUMINUM PIPE – BLUE		
19 ft Length	DN	400
1000	3/4"	
2000	1"	
4000	1 1/2"	
5000	2"	
6000	2 1/2"	
7000	3"	
8000	4"	
9000	6"	
A000	8"	

ALUMINUM PIPE – GREEN		
19 ft Length	DN	400
1061	3/4"	
2061	1"	
4061	1 1/2"	
5061	2"	
6061	2 1/2"	
7061	3"	
8061	4"	
9061	6"	
A061	8"	

ALUMINUM		
PIPE – GRAY		
19 ft Length	DN	0
1062	3/4"	-00
2062	1"	
4062	1 1/2"	
5062	2"	
6062	2 1/2"	
7062	3"	
8062	4"	
9062	6"	
A062	8"	

EQUAL 90° ELBOW		
	DN	
1003	3/4	
2003	1"	
4003	1 1/2"	
5003	2"	

5003	2"	
6003	2 1/2"	
7003	3"	
8003	4"	A.C.
9003	6"	The second second
A003	8"	71

EQUAL TEE		. 40
	DN	-0
1005	3/4	
2005	1"	
4005	1 1/2"	
5005	2"	
6005	2 1/2"	
7005	3"	
8005	4"	
9005	6"	
A005	8"	

EQUAL 45° ELBOW		
1004 2004 4004 5004	3/4 1" 1 1/2" 2"	
6004 7004 8004	2 1/2" 3" 4"	

	<u>_</u>	1110	3/4
8004	4"	1119	
9004	6"	2019	1"
A004	8"	2219	1"
		4419	1 1/2
*Supplied with (2) un	ion connectors	5519	2"
		6619	2 1/2
		7719	3"
END CAP		*Supplied with	union connector
1006	(DN) 3/4"		
2006	1"	8//	
2006 4006	1" 1 1/2"	UNIVER	SAL QUICK

A006

*Supplied with union connector

1002	3/4		1.0
2002	1"		
4002	1 1/	'2 "	
5002	2"		
6002	2 1/	<u> 2"</u>	1960
7002	3"		
8002 9002	4" 6"		
A002	8"		-
REDUCIN	NG TEE		a V
	DN	DN	-6
2407	1"		1
2107 4207	1" 1 1/2"	3/4 1"	1
4207 5207	2"	1"	
5407	2"	1 1/2"	
6407	2 1/2"	1 1/2"	4
6507	2 1/2"	2"	
7407	3"	1 1/2"	
7507	3"	2"	
8507	4"	2"	
	nion connectors		
*Supplied with u			
	3"	2 1/2"	
7607		2 1/2"	-
7607 8607	3" 4" 4"	2 1/2" 3"	I
7607 8607 8707	3" 4" 4" 6"	2 1/2" 3" 2 1/2"	
7607 8607 8707 9607 9707	3" 4" 4" 6"	2 1/2" 3" 2 1/2" 3"	
7607 8607 8707 9607 9707	3" 4" 4" 6" 6"	2 1/2" 3" 2 1/2" 3" 4"	
7607 8607 8707 9607 9707 9807 A607	3" 4" 4" 6" 6" 6"	2 1/2" 3" 2 1/2" 3" 4" 2 1/2"	
7607 8607 8707 9607 9707 9807 A607 A707	3" 4" 4" 6" 6" 6" 8"	2 1/2" 3" 2 1/2" 3" 4" 2 1/2" 3"	
7607 8607 8707 9607 9707 9807 A607	3" 4" 4" 6" 6" 6"	2 1/2" 3" 2 1/2" 3" 4" 2 1/2"	

2017

2117

2217

4217

4317

4417

4517

5417

5517

6617

7617

7717

1115 2015

2215

4415

5515

1113

2013

2213

4413

5513

9410

9510

A410

A510

5199

8199

A099 A199

2210

4110

4210

5110

5210

6110

6210

7110

7210

8110

8210

9110

9210

A210

3/4"

PIPE-TO-PIPE

CONNECTOR





	DN	DN	
2121	1"	3/4"	-
4221	1 1/2"	1"	
5221	2"	1"	
5421	2"	1 1/2"	
6421	2 1/2"	1 1/2"	
6521	2 1/2"	2"	
7521	3"	2"	
*Supplied with t	union connectors 3"	2 1/2"	-
7621	<u>_</u>	2 1/2	
	4"	2 1/2"	
8621			
8621 8721	4"	2 1/2"	
7621 8621 8721 9721 9821	4" 4"	2 1/2"	

FEMALE THR ADAPTER	EADED		2. 8.
	DN	NPT	-
1019	3/4	1/2"	
1119	3/4	3/4"	
2019	1"	1/2"	
2219	1"	1"	
4419	1 1/2	" 1 1/2"	
5519	2"	2"	
6619	2 1/2	" 2 1/2"	
7719	3"	3"	1 . 1


4184 1/4" Industrial (ISO B) Nipple to 1/4" Male NPT

8184 3/8" Industrial (ISO B) Nipple to 3/8" Male NPT

Сиррпо	d with dilloh confliction
	VERSAL QUICK IPLERS
1484	1/4" ISO 6150B/ Automotive Body to 1/2" Male NPT
3884	3/8" ISO 6150B/ Automotive Body to 1/2" Male NPT
4284	1/4" Automotive Nipple to 1/4" Male NPT
8284	3/8" Automotive Nipple to 3/8" Male NPT



BALL VALVE

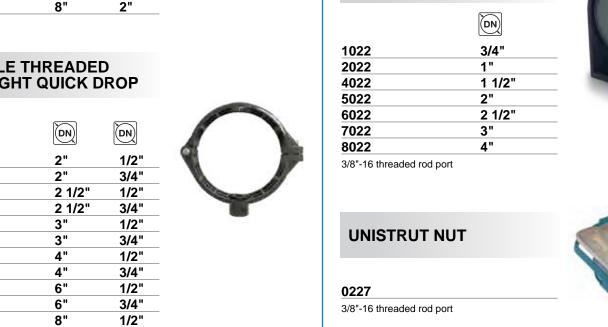




A055

8" 61.18"

			*Supplied with (2) union connectors		
FEMALE TH					
	DN	NPT		30° CONNECTION	LENGTH
2011	1"	1/2"	11 1	4155	1 1/2" 47.24"
4011	1 1/2"	1/2"	C. A.	5155	2" 53.15"
4111	1 1/2"	3/4"	100		
5011	2"	1/2"		-	1100
5111	2"	3/4"			
6011	2 1/2"	1/2"		30° CONNECTION	(DN) LENGTH
6111	2 1/2"	3/4"			
7011	3"	1/2"		6155	2 1/2" 53.15"
7111	3"	3/4"		7155	3" 72.83"
8011	4"	1/2"		8155	4" 74.80"
9011	6"	1/2"		*Supplied with (2) union co	
				Supplied with (2) union to	7111601013

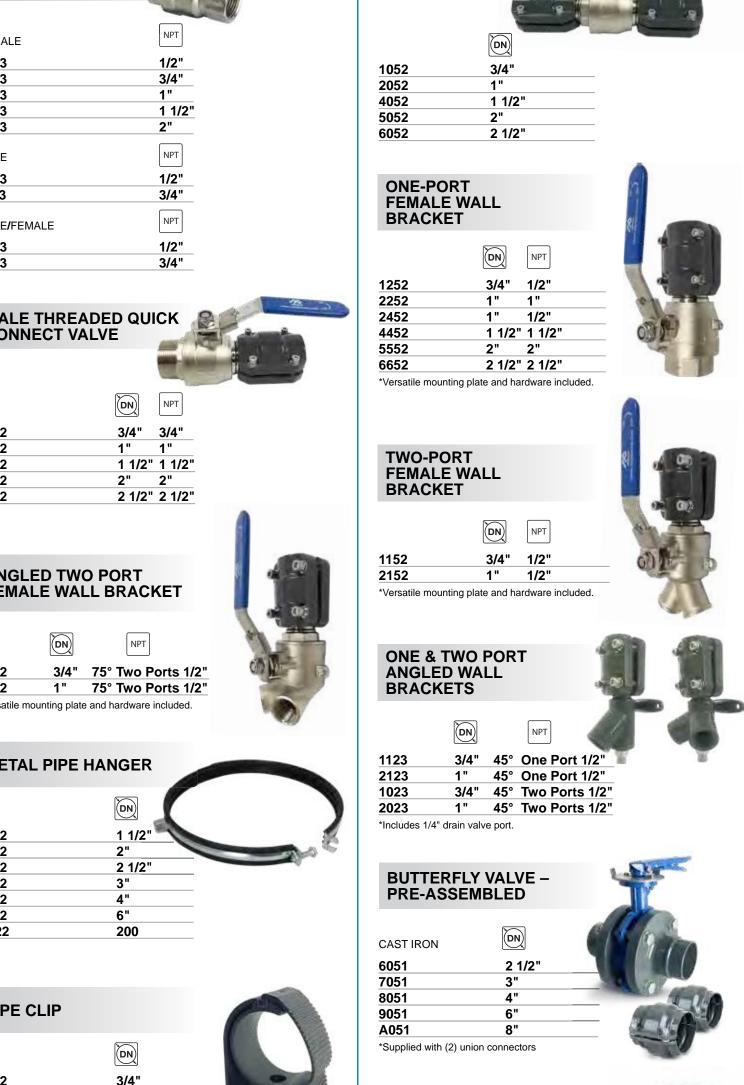

ALUMINUM FLANGE

*Supplied with union connector, gasket and bolt kit

Size

2 1/2"

*Supplied with union connector, gasket and bolt kit

NPT ADAPTER

THREADED MALE x FEMALE

Female

1 1/2"

1 1/2"

2 1/2"

1/2"

1/2"

1/2"

3/8"

1/2"

3/4"

1/2"

3/4"

THREADED ADAPTER

2"

3"

3/4"

1/4"

1/2"

1/2"

1 1/2" 1 1/2"

2 1/2"

2 1/2"

Flange

Size

2 1/2"

ALUMINUM REDUCING

7170

8170

9170

A170

6771

8771

7871

9871

6250

7250

7450

7550

8250

8350

2231

FLANGE

QUICK CONNECT

VALVE



MANIFOLDS

*All threads are ½" NPT.

CUTTER

HOLE SAW

ELECTRIC PIPE

Two-port

Three-port

Four-port

22mm

25mm

38mm

51mm

*Consult sizing chart for proper bit selection.

Each Hole Saw Bit requires a Drill Arbor & Pilot Bit.

0283

0383

0783

0344

0343

0443

0543

SP SP SP SP





